



**Community Development and Sustainability Department**

23 Russell Boulevard, Suite 2, Davis, California 95616

Phone: (530)757-5610 TDD: (530)757-5666


Website: <https://cityofdavis.org/city-hall/community-development-and-sustainability>

Email: [cddweb@cityofdavis.org](mailto:cddweb@cityofdavis.org)

# ANODE BAG REQUIREMENTS

Minimum Anode Protection Requirement for coated Metal Gas Piping in Average Soil:

Anode Size	Gas Piping Size				
	½" to ¾"	1" to 1 ½"	2"	3"	4"
3 lb. Anode	45 ft.				
5 lb. Anode	74 ft.	42 ft.	34 ft.	23 ft.	
9 lb. Anode		76 ft.	61 ft.	41 ft.	32 ft.
17 lb. Anode			115 ft.	78 ft.	60 ft.

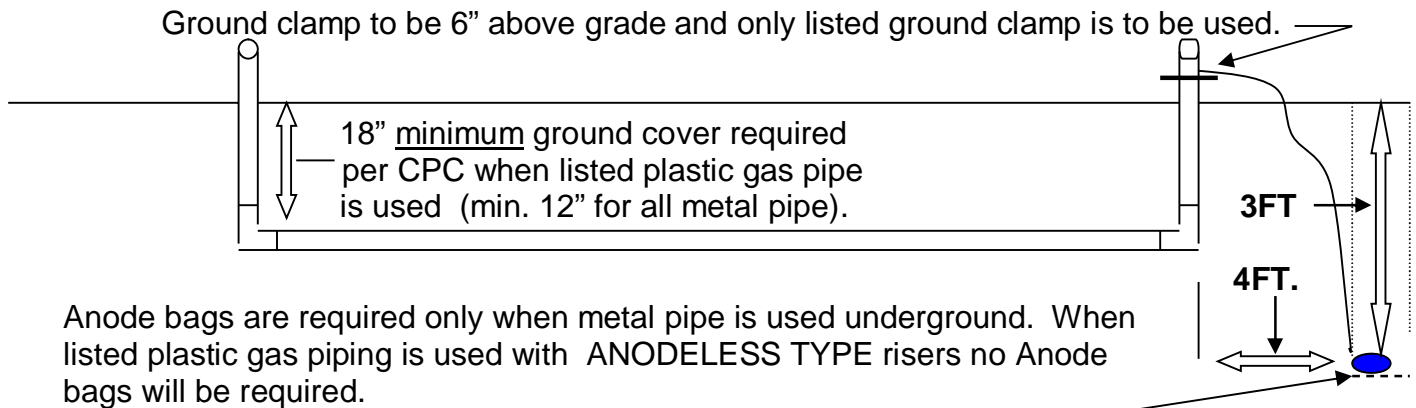

Anode bags are required only when metal pipe is used underground. When listed plastic gas piping is used with ANODELESS TYPE risers no Anode bags will be required.

**\*\*Not to Scale**

**Anode Bags to be sized Per Chart Above.**

*Note to all Plumbers, Contractors, inspectors and interested parties; the Anode bag requirement was adopted with the adoption of the 1994 Codes and has been enforced since January 1, 1996.*